
TPS30 Series

Features

- · Robust build allows high or low pressure measurement in high and low temperature environments.
- : high pressure (0 to 60MPa), low pressure (0 to 2 MPa) : temperature range (-40 to 125°C) (may vary by model)
- · For diverse applications including packaging machines, heavy machinery, factories, and shipbuilding.
- Pressure measurement of any gas, liquid, or oil.
- 316L stainless steel diaphragm for high corrosion resistance.
- · Compact size allows easy installation in tight or limited spaces.
- 1ms high-speed response rate.
- Analog output: Voltage (1-5 VDC), Current (DC 4-20 mA)

- Built-in reverse polarity protection circuit.
- · Various connector types : cable type, DIN43650-A connector type, DT04-3P connector type, M12 connector type, head type.
- Available thread sizes: G3/8, G1/4, R1/2
- Protection structure: IP67 (IEC standard) (except DIN43650-A connector type: IP65)

Ordering Information

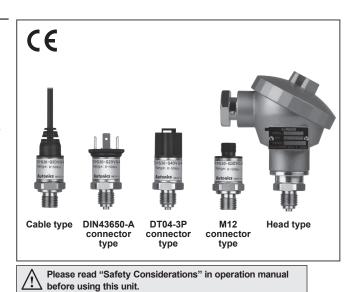

TPS30 - G 2	9	V	G 8	-	00	(0 to 0.5MPa)					
0 0 3	4	5	6		7	8					
	Descr	iption									
①Item	TPS3)	Pressure Transmitter								
@Measurement pressure	G		Gauge pressure, sealed gauge pressure ^{×1}								
	A		Absolute pressure								
	1		Head type								
	2		DIN43650-A connector type								
③Cable	3			M12 connector type							
	4		DT04-3P connector type								
	5		Cable type								
		<u> </u>	Gauge p		re		Absolute pressure				
	3		0 to 0.1N				0 to 0.1MPa				
	4		0 to 0.2	/IPa			0 to 0.2MPa				
	5		0 to 0.7N				0 to 0.7MPa				
	6		0 to 1MF				0 to 1MPa				
	7		0 to 2MF				0 to 2MPa				
	8 ^{×2}		0 to 3.5N								
	9 ^{×2}		0 to 5MF	° a							
	A ^{⊗2}		0 to 10N								
④Pressure range	B ^{%2}		0 to 20N	IPa							
Griessule lange	C ^{⋇₂}		0 to 40N	IPa							
	D ^{**2}		0 to 50N								
	E ^{**2}		0 to 60N	IPa							
			Sealed gauge pressure ^{×1}								
	F		-0.1 to 0MPa								
	G		-0.1 to 0								
	Н		-0.1 to 0	7MPa	a						
	J		-0.1 to 1	MPa							
	K		-0.1 to 2	MPa							
	Z		Others								
⑤Output type	V		Voltage								
	А		Current			output					
	G8		G3/8 (PF	F)(EN3	387)						
	G4		G1/4 (PF	F)(EN3	387)						
	R2		R1/2 (PT)(DIN3852)								
	N4		NPT1/4	(DIN3	852)						
	ZZ ^{×3}		Others (option)								
	00		Not used								
	21		"I" type 2	2m							
⑦Option (connector cable) ^{**4}	2L		"L" type								
/	51		"I" type :								
	5L		"L" type 5m								
Iser pressure range	-	_	User pressure range ^{×5}								
	1	_			-	unture It is based on star					

X1: The pressure is sealed gauge pressure. The unit is sealed structure. It is based on atmospheric pressure 101.3kPa (1.013bar).

 2: G1/4 is the standard pressure port. For the other pressure ranges, G3/8, R1/2 are standard pressure ports.
 3: The option ports are sold separately. In case of large amount ordering, contact the Autonics for manufacturing the requested pressure port. %4: Only for M12 connector type.

*5: Write the desired pressure range and it is the default of user pressure range. (select "Z" at @Pressure range)

Specifications


Specificat	ions																		A. Recorders
Series	TP	-S30																	
Pressure type		Gauge pressure, absolute pressure				Sealed gauge pressure ^{**1}					Gauge pressure						B. Indicators		
Rated pressure range (MPa)	0 to 0.1	1 0.2	.2 0.).7	0 to 1	0 to 2	-0.1 to 0	-0.1 to 0.1	-0.1 to 0.7	-0.1 to 1	-0.1 to 2	0 to 3.5	5	10	20	40	0 to 50	60	C. Converters
Expanded analog output range (MP		-	-		0 to 1.1	0 to 2.2	-0.1 to 0.01	-0.1 to 0.12	-0.1 to 0.78	-0.1 to 1.11	-0.1 to 2.21	0 to 3.85	0 to 5.5	0 to 11	0 to 22	0 to 44	0 to 55	0 to 66	D. Controllers
Max. pressure range (MPa)	0.6	6 0.6	.6 3		3	3	0.6	0.6	3	3	3	10	20	50	80	120	120	120	E. Thyristor
Burst pressure (MPa)	0.6	6 0.6	.6 3	:	3	3	0.6	0.6	3	3	3	15	30	75	120	160	160	160	Power Controllers
Measured materials Power supply				· · ·				environmer -P: max. 1		nless steel	el 316L)	11_3		<u>- (ri</u>	na F		<u></u>	207.)	F. Pressure Transmitters
Power supply Permissible voltage range) to 110 ⁰					(прые г -	Р. Шал. т	0%)	·Current	օսւրսւ ւյթ	<u>e: 11-5</u>	6000	<u>, (11</u>)pie r	-F. Inc	<u>1X. 10</u>	<u>%)</u>	G. Temperature Transmitters
Current consumption		Voltage		ıt type	e: max	. 20mA	• Curre	ent output	t type: max	x. 30mA									H. Accessories
Response time		ax. 1ms																	L
Protection circuit		everse p																	
Output type	• V	Voltage	output	it type	<u>):</u> 1-5V	/DC==	• Curr	ent output	it type: DC	,4-20mA									
Compensation temperature		-10 to 80°C 0 to 80°C						-											
Accuracy		Max. ±0.5% F.S. (including linearity, hysteresis, reproducibility)						l											
Linearity		ax. ±0.2																	
Hysteresis Temp. Zero Shift		ax. ±0.2				- dard)		250/ E S	/10°C (max										
Temp. Zero Shift Temp. Span Shift					- (//			/10°C (max /10°C (max	,									
Temperature		1X. 10.1	1701.0	3./10	0 (Stai	iluaiu),	[IIax. ±0.1	20701.0.,	10 0 (116)	<u>x.</u> j		-25 tc	<u>100°r ר</u>	C· ma	× ±1.	5% F.S	<u>s</u>		1
characteristics																.5% F.S			
Load resistance						(supplying	24VDC)				<u> </u>							
Dielectric streng	th 500	00VAC 5	50/60H	Hz for	1 min	iute													
Insulation resistance		ver 100I					,												TPS30
Ambient outpu	out · C	Cable ty	type: -4	40 to 8	80°C, s	storage	e: -40 to 8	30°C							-				TPS20
Ambient output temp. Curre output Ambient humic	ut ·C	Cable ty	type: -4				tor type, N e: -40 to 8		ector type	., DT04-3⊦	P connecto	or type:	-40 to	ວ 85 ັບ), stor	age: -	40 to	125°C	кт-302Н
Fluid temp.		0 to 85%																	
Vibration		$\frac{0}{12}$ $\frac{1}{2}$ 1		0H7								20g, 2	20 to (2 000	 Н7				DTEAD
Shock	-)0g/6ms		0112								500g/		2,000.	<u> 1</u> ∠				PTF30
Tightening torqu												0003							
Protection				112 co	nnect	or type	DT04-3	P connect	tor type, c	able type	: IP67 (IEC	C stand	lard)						
structure	۰D	DIN436	650-A d	conne	ector t	type: IP	265 (IEC s	standard)											
Material	wa	ater-pro	oof rub	bber: s	silicon	י ו				asting), cor	onnector: p	olybuty	ylene	terepl	nthala	ite G3	0,		
Connection		Voltage	outpu	ut type	e: +, -,	Vout	• Current	t output ty	/pe: +, -										
Approval	CE																		
Weight ^{×2}	· D	DIN436	650-A c	conne	ector ty	ype, M1	ox. 250g) 2 connect ox. 120g)	21 /	DT04-3P	connector	r type: appr	rox. 13	0g (ap	prox.	50g)				
%1: The sensor						• • • •	• /		101.3kPa	(1.013bar).								1

%1: The sensor is sealed structure. It is based on atmospheric pressure 101.3kPa (1.013bar).
%2: The weight includes packaging. The weight in parenthesis is for unit only.
%Environment resistance is rated at no freezing or condensation.

TPS30 Series

Dimensions



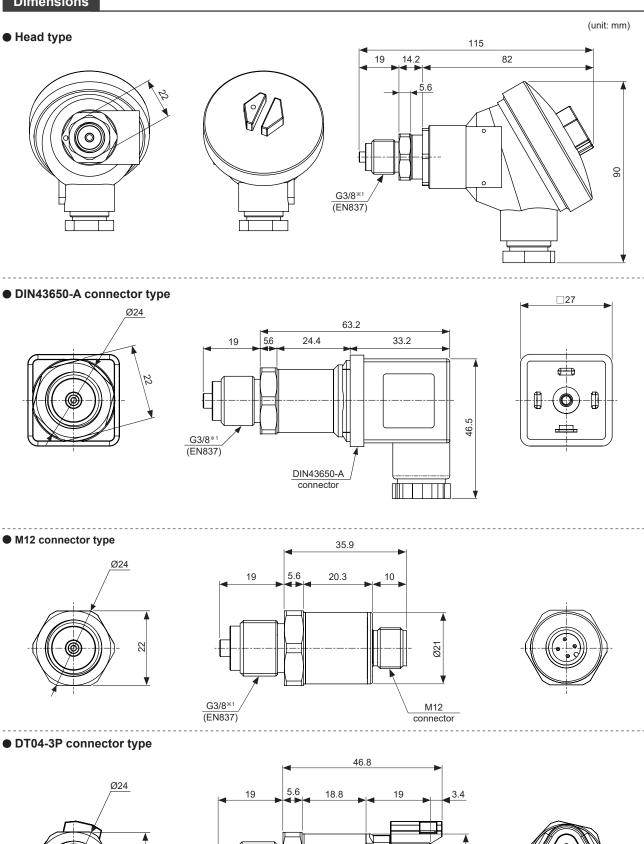

Ø21

DT04-3P

connector


Connector: CS-DT3P, sold separately

- Autonics -

22

G3/8^{×1}

(EN837)

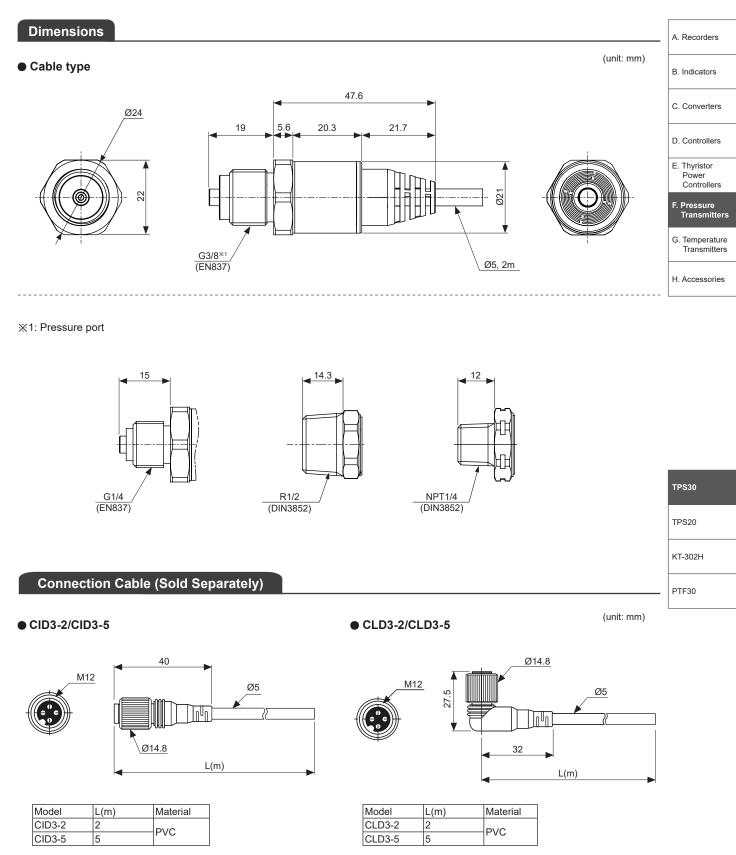

XOnly for M12 connector.

Connector

• Voltage output type

	Head type	DIN43650-A connector type	M12 connector type	DT04-3P connector type	Cable type
Pin type	VCC GND Vout				Brown Black Blue
Function	Pin				
+	VCC	1	1	A	Brown
-	GND	(3	С	Blue
Vout	Vout	2	4	В	Black
N·C	—	3	2	—	—

• Current output type


	Head type	DIN43650-A connector type	M12 connector type	DT04-3P connector type	Cable type
Pin type	VCC GND Vout				Blue
Function	Pin				
+	VCC	1	1	A	Brown
-	GND	\oplus	3	С	Blue
N·C	Vout	2, 3	2, 4	В	_


XIn case of head type, remove the top cover.



Troubleshooting

Error	Troubleshooting
No outputs	Check the power supply. Check the polarity (+, -) when wiring the cable.
	Check the connection part.
Abnormally fluctuating output	Check the power supply. Check the supplied pressure. Check the pressure line.
Out of zero point output value	Check the power supply. Check the load resistive value of current output type for a receiver is over 700Ω . (when supplying 24VDC) Check the measuring point and transmission distance. Check the line resistance is below 700Ω .

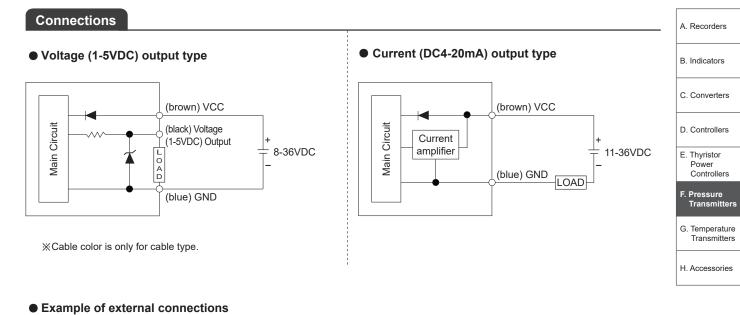

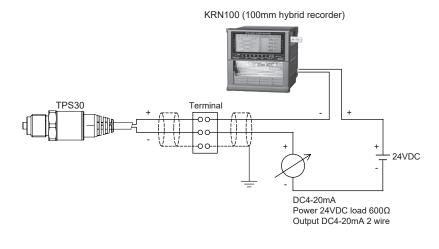

TPS30 TPS20 KT-302H PTF30

Proper Usage

- 8-36VDC, 11-36VDC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device
- When installing the unit on pipe line, use the hexagon part of connections not to turn the unit with a pipe wrench. Do not use the unit with strong vibrations.
- The unit is manufactured with precisely. If you drop or shock the unit, it may lose the function. Please treat the unit carefully.
- Store the unit at the place without moisture, dust, and vibration.
- This product which does not have drive part at sensing part does not need to repair it. Even though inside of pressure pipe is normally clean, it needs to take maintenance once a year as below instructions.
 - ① Check the broken status of outside.
 - 2 Check the pressure slot, cleanliness inside, and corrosion state.
 - ③ Short each terminal and check the insulation resistance between the case and power. (at 500VDC, over $100M\Omega$)
 - ④ Check zero, span adjustment and linearity by pressure standards.
- When removing a sensor for maintenance, follow the below instructions.
 - ① Replace an O-ring which is used once.
 - 2 Be sure that diaphragm part is not damaged.

- · Connect the power with the crimp terminals.
- Switch or circuit breaker should be installed nearby users for convenient control.
- Do not use the unit near the high frequency instruments (high frequency welding machine & sewing machine, large capacity SCR controller).
- · The unit cannot be repaired due to disassembled structure.
- The unit is fixed with bolt and nut at the both sides of case. Do not press excessive load (approx. 300kg/cm²), or it may cause damage to the unit.
- · Do not pull the cables with over 30N of tension force.
- Tighten the cable connection part firmly not to enter water to the cable.
- This product may be used in the following environments. ① Indoors / Outdoors
- ② Altitude max. 2,000m
- ③ Pollution degree 2
- ④ Installation category II